

EUP10A-1HMC-1-350 (Product No.:103101150201)

Summary

EUP10A-1HMC-1-350 is a constant current output mode LED driver. The output current can be easily set via DIP switch, and the driver can be adjusted by the external 0/1-10VDC active signal, PWM signal, or adjustable resistance to achieve the smooth dimming effect.



Product Features

- Single channel output, output current level selectable by DIP S.W.
- Support 3-in-1 dimming mode(0/1-10V active signal, adjustable resistance, PWM)
- High input voltage of 220VAC ~ 240VAC
- High efficiency up to 75%
- 100% output when no dimming signal input, can be used as normal power supply
- Dimming effect smooth, no flicker
- Protections: Short circuit, over load, over temperature
- Suitable for indoor LED lighting application, such as down light, spot light, and so on




Application




Technical Parameters

| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------------------|---------------------------|---|--------------------|---------------------|--------------------|-------|-------|-------|-------|-------|---|---|---|---|---|---|---|---|---|--|--|-------|-------|-------|-------|-------|-------|-------|-------|-------|--|--|--|--|--|-------|-------|-------|-------|-------|-------|-------|-------|-------|--|--|--|
| Model | EUP10A-1HMC-1-350 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Input | Efficiency | 75%@230VAC,Full load | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Voltage | 220VAC-240VAC | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Frequency Range(Hz) | 50/60Hz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Power Factor | >0.5@230VAC,Full load | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | AC Current(max) | 0.12Amax@230VAC | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Inrush Current(max) | Cold start,18A(twidth=14us measured at 50% Ipeak)@230VAC | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Output | Current(mA)/Voltage (VDC) | 350mA/2-21VDC/7.35W | 400mA/2-21VDC/8.4W | 450mA/2-21VDC/9.45W | 500mA/2-20VDC/10W | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Power(W) | 550mA/2-18VDC/9.9W | 600mA/2-16VDC/9.6W | 650mA/2-15VDC/9.75W | 700mA/2-14VDC/9.8W | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Ripple Current | <3% | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Channel | 1 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Current Tolerance | ±7% | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | No load output voltage | 25VDC Max | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | Current Selection Table <table border="1"> <tr> <td>ON</td> <td>OFF</td> <td>1</td> <td>2</td> <td>3</td> <td>1</td> <td>2</td> <td>3</td> <td>1</td> <td>2</td> <td>3</td> <td>1</td> <td>2</td> <td>3</td> </tr> <tr> <td></td> <td></td> <td>350mA</td> <td>400mA</td> <td>450mA</td> <td>500mA</td> <td>550mA</td> <td>600mA</td> <td>650mA</td> <td>650mA</td> <td>700mA</td> <td></td> <td></td> <td></td> </tr> <tr> <td></td> <td></td> <td>2-21V</td> <td>2-21V</td> <td>2-21V</td> <td>2-20V</td> <td>2-18V</td> <td>2-16V</td> <td>2-15V</td> <td>2-15V</td> <td>2-14V</td> <td></td> <td></td> <td></td> </tr> </table> <p>Remark: Function default setting is: 350mA (@switch are all OFF state)</p> | | | | ON | OFF | 1 | 2 | 3 | 1 | 2 | 3 | 1 | 2 | 3 | 1 | 2 | 3 | | | 350mA | 400mA | 450mA | 500mA | 550mA | 600mA | 650mA | 650mA | 700mA | | | | | | 2-21V | 2-21V | 2-21V | 2-20V | 2-18V | 2-16V | 2-15V | 2-15V | 2-14V | | | |
| ON | OFF | 1 | 2 | 3 | 1 | 2 | 3 | 1 | 2 | 3 | 1 | 2 | 3 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | 350mA | 400mA | 450mA | 500mA | 550mA | 600mA | 650mA | 650mA | 700mA | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | 2-21V | 2-21V | 2-21V | 2-20V | 2-18V | 2-16V | 2-15V | 2-15V | 2-14V | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Function | Dimming Type | 0/1-10V active signal, adjustable resistance, PWM | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Protection | Short Circuit | after fault removed Close output ,the output current recovers automatically | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Over Load | When the output voltage is exceeded, the output current decreases and, recovers automatically when the load is reduced. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Over Temperature | Shut down the output, recovers automatically when temp. back to normal. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Others | Working Temp. | -20°C~50°C | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Storage Temp., Humidity | -40°C~85°C, 20-90%RH | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | tc | 75°C | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Material | PC | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | IP Rating | IP20 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Lifetime | 30,000h@tc:75°C | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Warranty Condition | 3 years | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Switch Cycle | >15,000 times | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Packing(weight) | Net weight: 90g±5%/PCS; 100PCS/Carton; 7kg±5%/Carton; Carton Size: 515*235*140mm(L*W*H) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Dimension | 110*30*22mm (L*W*H) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |


Dimension(mm)

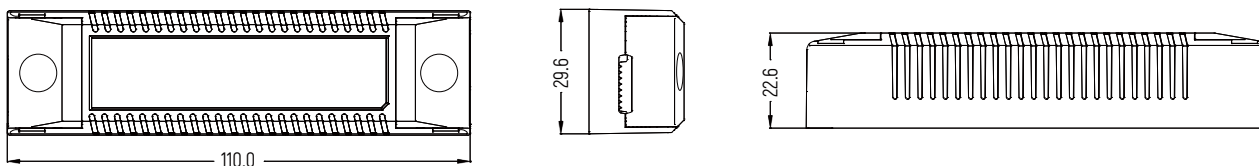


0/1-10V Wiring

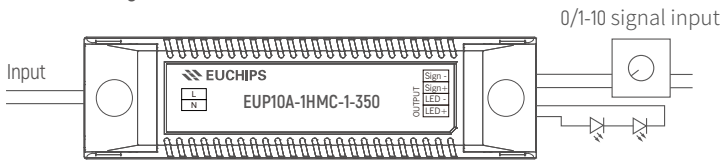

Dimming Curve



Derating Curve



Cautions

- 1.This product should be installed by qualified personnel.
- 2.This product is non waterproof, need to avoid sun and rain.In case of outdoor use, please ensure it is mounted in a water proof enclosure.
- 3.Good heat dissipation conditions extend product life. Please install the product in a well-ventilated environment.
- 4.Please make sure LED power supply output voltage, current is used to meet the product requirements.
- 5.Please ensure that adequate sized cable is used from the controller to the LED lights to carry the current. Please also ensure that the cable is secured tightly in the connector.
- 6.Due to safety concerns, PVC or rubber cord of 0.75- 1.5mm² is recommended for input and output terminal(s)(excluding signal terminals). Flat power cord is not suitable.Ensure all wire connections and polarities are correct before applying power to avoid any damages to the LED lights.
- 7.In case of malfunction, do not repair it yourself.

※ The contents of this manual are updated without prior notice. If the function of the product you are using is inconsistent with the instructions, the function of the product shall prevail.Please contact us if you have any questions .

EUP10A-1HMC-1-350 (产品代码:103101150201)

概述

EUP10A-1HMC-1-350是一款可以提供350/400/450/500/550/600/650/700mA 8档电流的LED驱动器。
输出电流可以通过DIP拨码开关简易设置，可以通过外部0/1-10V有源信号，可调电阻，PWM信号实现平滑调光；当不接外信号时，可作为常规电源使用。



产品特点

- 单通道恒流输出，多级电流可选
- 支持三合一调光（0/1-10V有源信号，可调电阻，PWM信号）
- 高电压输入：220VAC ~ 240VAC
- 效率高达 75%
- 信号悬空时，满载输出，可作为电源使用
- 过载保护，短路保护，过温保护
- 适用于LED室内灯具,比如筒灯, 射灯、面板灯等


应用




技术参数

| 型号 | EUP10A-1HMC-1-350 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|----|-------------------|---|-------|-------|-------|-------|-------|-------|-------|--|--|--|--|--|--|--|--|--|--|--|--|--|--|-------|-------|-------|-------|-------|-------|-------|-------|--|--|--|--|--|--|--|--|--|--|--|-------|-------|-------|-------|-------|-------|-------|-------|--|--|--|--|--|--|--|--|--|
| 输入 | 效率 | 75%@230VAC, 满载 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 电压 | 220VAC-240VAC | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 频率 | 50/60Hz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 功率因素 | >0.5@230VAC, 满载 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 电流 | 0.12Amax@230VAC | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 浪涌电流 | 冷启动18A(在 50%Ipeak 下测twidth=14us)@230VACC | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 输出 | 电流/电压/功率 | 350mA/2-21VDC/7.35W 400mA/2-21VDC/8.4W 450mA/2-21VDC/9.45W 500mA/2-20VDC/10W 550mA/2-18VDC/9.9W 600mA/2-16VDC/9.6W 650mA/2-15VDC/9.75W 700mA/2-14VDC/9.8W | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 波纹电流 | <3% | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 通道 | 1 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 电流公差 | ±7% | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 空载输出电压 | 25V Max | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | 电流选择表 <table border="1"> <tr> <td>ON</td> <td>OFF</td> <td>1</td> <td>2</td> <td>3</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td></td> <td></td> <td>350mA</td> <td>400mA</td> <td>450mA</td> <td>500mA</td> <td>550mA</td> <td>600mA</td> <td>650mA</td> <td>700mA</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td></td> <td></td> <td>2-21V</td> <td>2-21V</td> <td>2-21V</td> <td>2-20V</td> <td>2-18V</td> <td>2-16V</td> <td>2-15V</td> <td>2-14V</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> </table> 备注：出厂默认设置电流为350mA(1,2,3在OFF状态) | ON | OFF | 1 | 2 | 3 | | | | | | | | | | | | | | | | | 350mA | 400mA | 450mA | 500mA | 550mA | 600mA | 650mA | 700mA | | | | | | | | | | | | 2-21V | 2-21V | 2-21V | 2-20V | 2-18V | 2-16V | 2-15V | 2-14V | | | | | | | | | |
| ON | OFF | 1 | 2 | 3 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | 350mA | 400mA | 450mA | 500mA | 550mA | 600mA | 650mA | 700mA | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | 2-21V | 2-21V | 2-21V | 2-20V | 2-18V | 2-16V | 2-15V | 2-14V | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 功能 | 调光方式 | 0/1-10V有源信号，可调电阻，PWM信号 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 保护 | 短路 | 关闭输出，排除故障后自恢复 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 过载 | 当超过输出电压时，输出电流减小，当负载降低时自动恢复 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 过温 | 关断输出,当温度恢复正常时自动恢复. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 其它 | 工作温度 | -20°C-50°C | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 储存温度、湿度 | -40°C-85°C, 20-90%RH | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | tc | 75°C | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 材质 | PC | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 防水等级 | IP20 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 寿命 | 30,000小时@tc:75°C | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 质保 | 3年 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 开关周期 | >15,000次 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 包装尺寸(重量) | 净重: 90g±5%/个; 100个/箱; 7kg±5%/箱; 外箱尺寸: 515*235*140mm(L*W*H) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 尺寸 | 110*30*22mm(长*宽*高) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |


尺寸(mm)

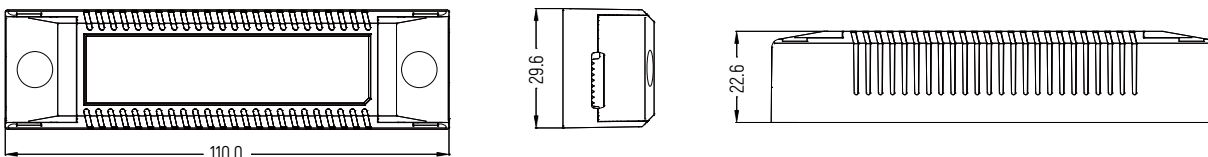


接线图

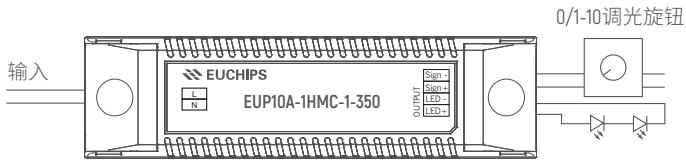

调光曲线

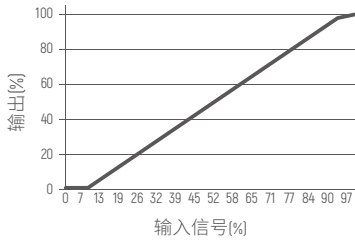

降额曲线



注意事项:

- 1、本产品请由具有专业资格的人员进行调试安装。
- 2、本产品不能防水，需避免日晒雨淋，如安装在户外，请用防水箱。
- 3、良好的散热条件会延长产品的使用寿命，请把产品安装在通风良好的环境。
- 4、请检查使用的LED电源输出电压电流，是否符合产品要求。
- 5、出于安全考虑，推荐输入和输出（信号端除外）用0.75-1.5mm² PVC或橡胶线缆，并确保接线牢固，以免电线过热或接触不良触发事故。扁平电源线不适用。
- 6、通电调试前，应确保所有接线正确，避免因接线错误而导致灯具损坏。
- 7、如果发生故障，请勿私自维修；如有疑问，请联系供应商。