

Intelligent LED Driver

- Adopt SAMSUNG/COVESTRO V0 flame resistant polycarbonate protective housings with small size and light weight.
- The clamshell design and screwless type for strain-relief, tensile strength of wires complies with the 0.5-1.5mm²wire diameter 60N tensile test, and complies with the tensile test standard GB7000.1-2015/IEC60598-1: 2014.
- Soft-on and fade-in dimming function enhances your visual comfort.
- T-PWM[™] dimming technology allows continuous and flicker-free images under high-speed shooting.
- Dimming from 0~100%, down to 0.01%.
- 0-100% flicker-free dimming with high frequency exemption level.
- Innovative thermal management technology protects the power life intelligently.
- Multi-current & wide voltage, suitable for different power LEDs.
- Class 2 LED driver, full protective plastic housing.
- Comply with Safety Extra Low Voltage standard.
- Overvoltage, overload, short circuit protection and automatic recovery.
- Suitable for indoor light applications of I/II/III type.
- Up to 50000-hour life time.
- 5-year warranty (RUBYCON capacitor).


T-PWM[™]
Super depth dimming technology

Flicker-free
IEEE 1789

Dimmable:
.....
0.01-100%



(The certification icons represent on-going certification applications only, and final certification qualification is subject to actual products.)



Technical Specs

Model	SE-9-350-700-G1T		SE-12-100-400-G1T	SE-15-350-700-G1T	
OUTPUT	Output Voltage	2-12Vdc		9-42Vdc	
	Max Output Voltage	≤22V		≤50V	
	Output Current	350-700mA		100-400mA	
	Load Power Range	0.7W-8.4W		0.9W-12W	
	Strobe Level	No visible flicker/High frequency exemption level			
	Dimming Range	0~100%, down to 0.01%			
	LF Current Ripple(<120Hz)	<3%			
	Current Accuracy	±5%			
	Ripple & Noise	≤4V			
PWM Frequency	3600Hz				
INPUT	Dimming Interface	Triac leading edge/ELV trailing edge			
	Input Voltage Range	220-240Vac			
	Frequency	50/60Hz			
	Input Current	≤0.08A/230Vac	≤0.09A/230Vac		
	Power Factor	PF>0.9/230Vac (Foll load)		≤0.1A/230Vac	
	THD	THD<15%/230Vac (Foll load)		PF>0.95/230Vac (Foll load)	
	Efficiency	>70%@700mA	>78%@300mA		
	Inrush Current (typ.)	Cold start10A@230Vac [Test twidth=200 us tested under50% Ipeak]			
	Anti Surge	L-N: 1kV			
Leakage Current	<0.5mA/230Vac				
ENVIRONMENT	Working Temperature	ta: -20 ~ 45°C tc: 90°C			
	Working Humidity	20 ~ 95%RH, non-condensing			
	Storage Temperature, Humidity	-40 ~ 80°C, 10 ~ 95%RH			
	Temperature Coefficient	±0.03%/°C [-20°C ~ 45°C]			
	Vibration	10-500HZ, 2G 12min/1cycle, 72 min for X, Y and Z axes respectively.			
PROTECTION	Overload Protection	Shut down the output and recover automatically once it exceeds 1.02-1.35 times of the rated power.			
	Overheat Protection	Intelligently adjust or turn off the current output if the PCB temperature ≥110°C. When the PCB temperature <90°C, automatically recover normal output.			
	Short Circuit Protection	When short circuit occurs, shut down the output and recover automatically.			
SAFETY & EMC	Withstand Voltage	I/P-O/P:3750Vac			
	Insulation Resistance	I/P-O/P:500VdC/25°C/70%RH≥100MΩ			
	Safety Standards	CCC	China	GB19510.1, GB19510.14	
		TUV	Germany	EN61347-1, EN61347-2-13, EN62493	
		CE	European Union	EN61347-1, EN61347-2-13, EN62384	
		KC	Korea	KC61347-1, KC61347-2-13	
		RCM	Australia	AS61347-1, AS61347-2-13	
		ENEC	Europe	EN61347-1, EN61347-2-13, EN62384	
		CB	CB member states	IEC61347-1, IEC61347-2-13	
		EAC	Russia	IEC61347-1, IEC61347-2-13	
	EMC Emission	CCC	China	GB/T17743, GB17625.1	
		CE	European Union	EN55015, EN61000-3-2, EN61000-3-3, EN61547	
		KC	Korea	KN15, KN61547	
		RCM	Australia	EN55015, EN61000-3-2, EN61000-3-3, EN61547	
		EAC	Russia	IEC62493, IEC61547, EH55015	
EMC Immunity	EN61000-4-2,3,4,5,6,8,11, EN61547				
Strobe Test Standard	IEEE 1789				
OTHERS	Dimensions	111×35×20mm(L×W×H)			
	Packing	122×36×22mm(L×W×H)			
	Weight[G.W.]	77.5g±10g			



LED Current Selection

SE-9-350-700-G1T	DIP Switch									
	Output Current	350mA	400mA	450mA	500mA	550mA	600mA	650mA	700mA	
	Output Voltage	2-12V	2-12V	2-12V	2-12V	2-12V	2-12V	2-12V	2-12V	
	Output Power	0.7-4.2W	0.8-4.8W	0.9-5.4W	1-6W	1.1-6.6W	1.2-7.2W	1.3-7.8W	1.4-8.4W	


SE-12-100-400-G1T	DIP Switch									
	Output Current	100mA	150mA	200mA	250mA	300mA	350mA	400mA		
	Output Voltage	9-42V	9-42V	9-42V	9-42V	9-40V	9-34V	9-30V		
	Output Power	0.9-4.2W	1.35-6.3W	1.8-8.4W	2.25-10.5W	2.7-12W	3.15-11.9W	3.6-12W		

SE-15-350-700-G1T	DIP Switch									
	Output Current	350mA	400mA	450mA	500mA	550mA	600mA	650mA	700mA	
	Output Voltage	9-42V	9-37.5V	9-33V	9-30V	9-27V	9-25V	9-23V	9-21.5V	
	Output Power	3.15-14.7W	3.6-15W	4.05-14.85W	4.5-15W	4.95-14.85W	5.4-15W	5.85-14.95W	6.3-15.05W	

- ★ After DIP switches set the current, power off and then power on to make the new current effective.
- ★ E.g. LED 3V/pcs: 9-42V can power 3-14pcs LEDs in series, 9-21.5V can power 3-7pcs LEDs, the max quantity of LEDs in series will be subject to the actual voltage of LED.


Product Size

Unit: mm

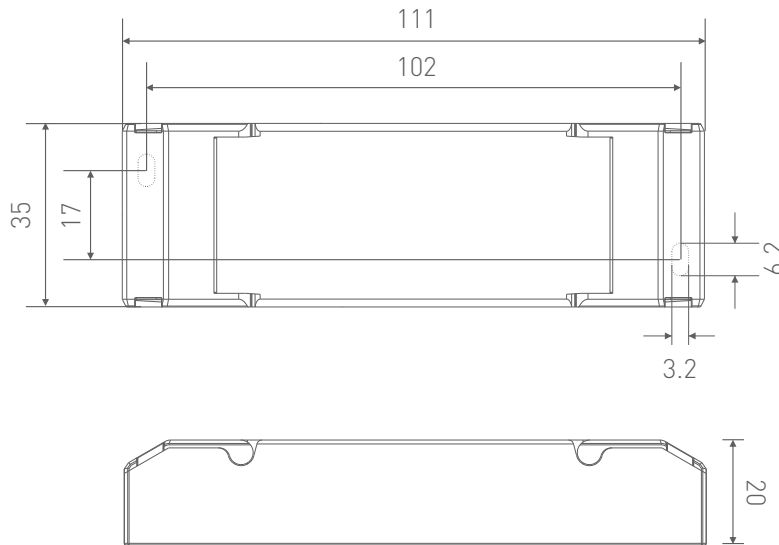

Wiring Diagram

Triac/ELV Connection Mode

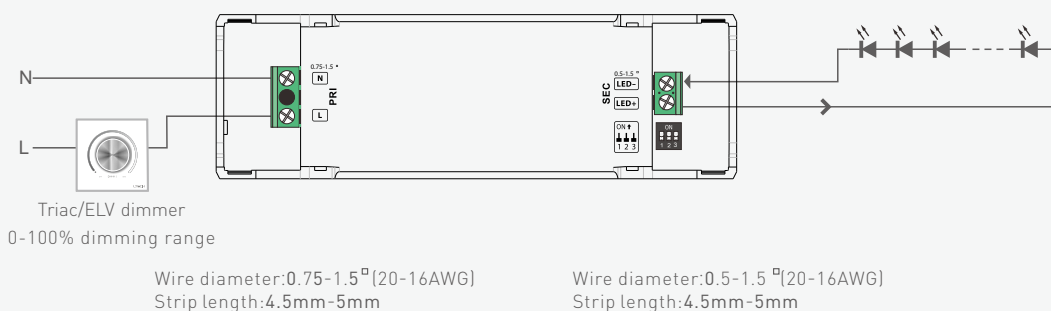

Protective Housing Drawings



1. Pry up the protective housing in the side plate position with a tool.



2. Pry up the side edge of the tension plate with a tool to remove it.

3. Use a screwdriver to connect electrical wires as wiring diagram shows.



4. Press down the tension plate to fix the electrical wires.

5. Close the protective housing.

Installation Precautions




Please do not stack the products. The distance between two products should be $\geq 15\text{cm}$ so as not to affect heat dissipation and the lifespan of the products.




Please not place the products on LED drivers. The distance between the product and the driver should be $\geq 15\text{cm}$ so as not to affect heat dissipation and shorten the lifespan of the products.

Relationship Diagrams


THD Characteristic Curve

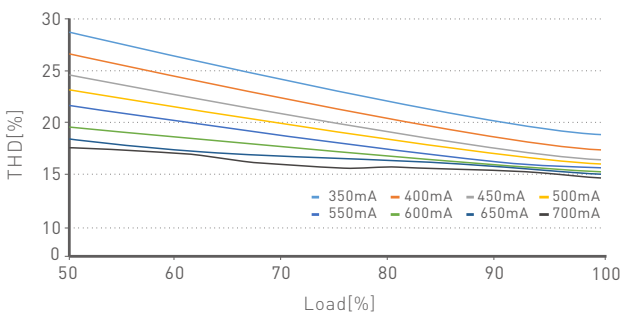




Efficiency VS Load

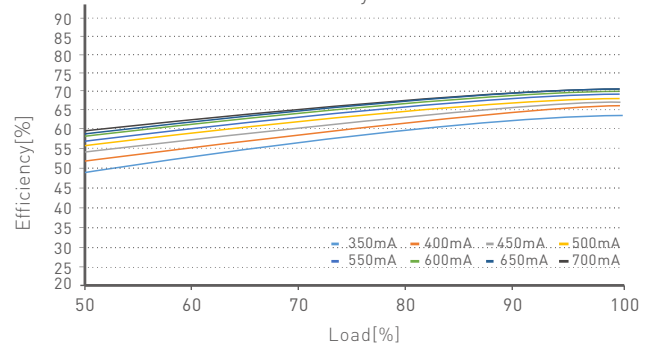




Power Factor Characteristic Curve

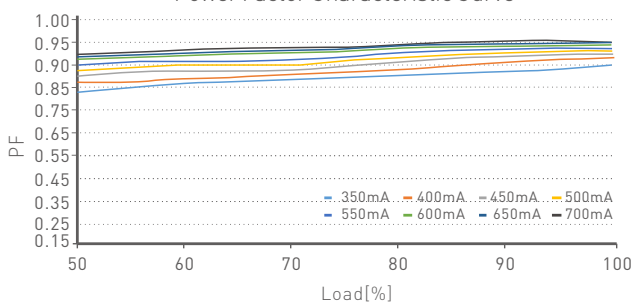

SE-9-350-700-G1T

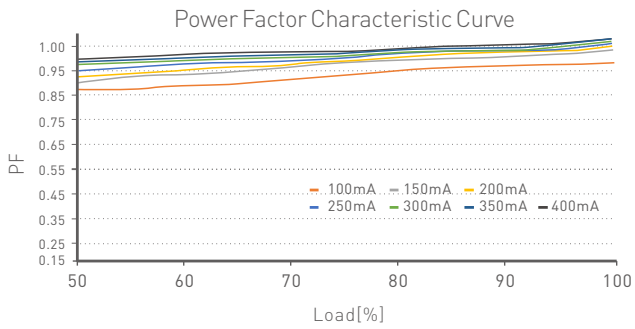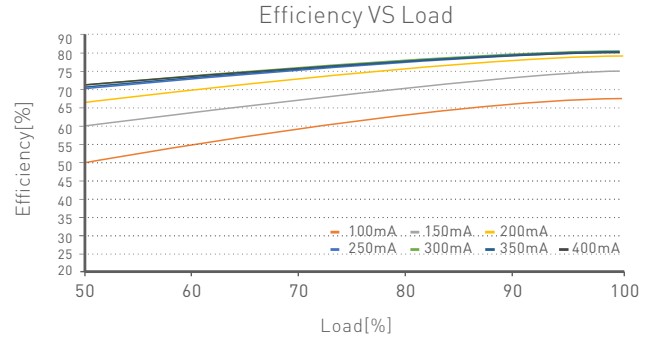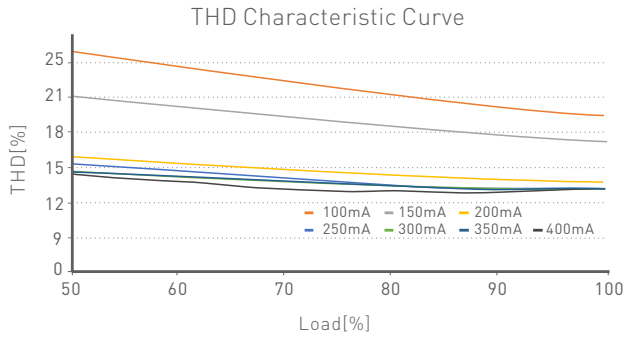

SE-12-100-400-G1T

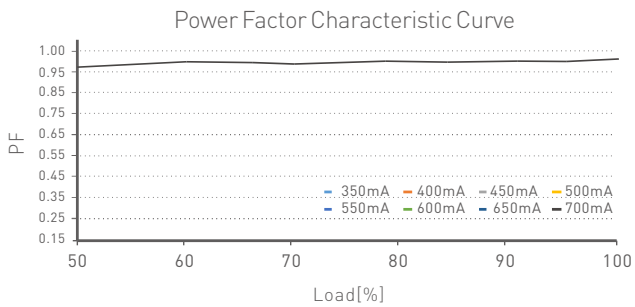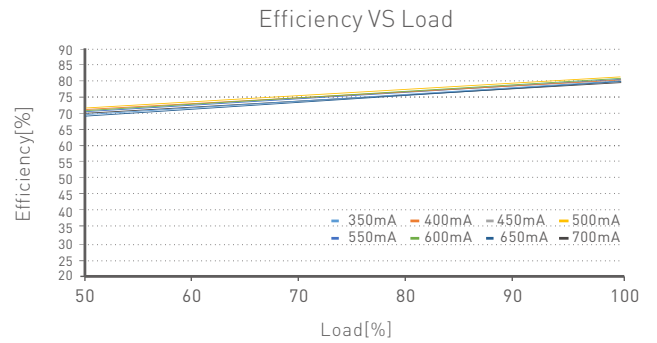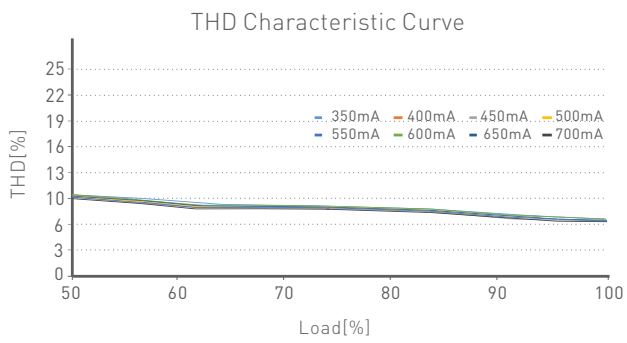

SE-15-350-700-G1T


Flicker Test Table

IEEE 1789

Limit Value of Modulation in Low Risk Areas	
Waveform frequency of Optical output	Limit value (%)
$f \leq 8\text{Hz}$	0.2
$8\text{Hz} < f \leq 90\text{Hz}$	$0.025 \times f$
$90\text{Hz} < f \leq 1250\text{Hz}$	$0.08 \times f$
$f > 1250\text{Hz}$	Exemption assessment
Limit Value of Modulation in No Effect Areas	
Waveform frequency of Optical output	Limit value (%)
$f \leq 10\text{Hz}$	0.1
$10\text{Hz} < f \leq 90\text{Hz}$	$0.01 \times f$
$90\text{Hz} < f \leq 3125\text{Hz}$	$(0.08/2.5) \times f$
$f > 3125\text{Hz}$	Exemption assessment (High-frequency exemption)

Brightness

- ▲ 0.1%
- ◆ 1%
- ◆ 5%
- ◆ 10%
- 20%
- 30%
- 40%
- ★ 50%
- 60%
- 70%
- 80%
- ★ 90%
- ◆ 100%

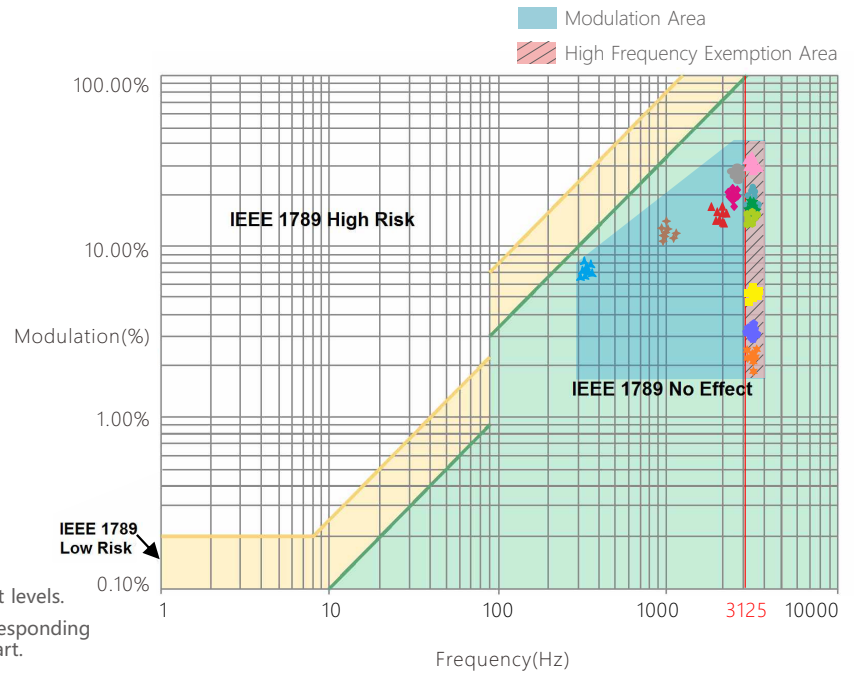

Marks in the right chart are tested results of different current levels. The output frequency is 0Hz in 100% brightness and its corresponding modulation is 0%, which could not be shown in the right chart.

Attentions

- Products shall be installed by qualified professionals.
 - LTECH products are non-waterproof (special models excepted). Please avoid the sun and rain. When installed outdoors, please ensure it is mounted in a water proof enclosure.
 - Good heat dissipation will extend the working life of products. Please ensure good ventilation.
 - Please check if the working voltage used complies with the parameter requirements of products.
 - The diameter of wire used must be able to load the light fixtures you connect and ensure the firm wiring.
 - Before you power on products, please make sure all the wiring is correct in case of incorrect connection that causes damage to light fixtures.
 - If a fault occurs, please do not attempt to fix products by yourself. If you have any question, please contact your suppliers.
- * This manual is subject to changes without further notice. Product functions depend on the goods. Please feel free to contact our official distributors if you have any question.

Warranty Agreement

- Warranty periods from the date of delivery : 5 years.
- Free repair or replacement services for quality problems are provided within warranty periods.

Warranty exclusions below:

- Beyond warranty periods.
 - Any artificial damage caused by high voltage, overload, or improper operations.
 - Products with severe physical damage.
 - Damage caused by natural disasters and force majeure.
 - Warranty labels and barcodes have been damaged.
 - No any contract signed by LTECH.
1. Repair or replacement provided is the only remedy for customers. LTECH is not liable for any incidental or consequential damage unless it is within the law.
 2. LTECH has the right to amend or adjust the terms of this warranty, and release in written form shall prevail.

Update Log

Version	Updated Time	Update Content	Updated by
A0	2020.02.21	Original version	Xu Shujun
A1	2021.04.01	Added technical specifications, LED current level selection and relationship diagrams. Updated the protective housing drawings.	Xu Shujun
A2	2021.12.24	Updated the silkscreen on the product.	Xu Shujun