

EUP30A-1HMC-1 (Product No.:103100242101)

Summary

EUP30A-1HMC-1 is a constant current output mode LED driver. The output current can be easily set via DIP switch, and the driver can be adjusted by the external 0/1-10VDC active signal, PWM signal, or adjustable resistance to achieve the smooth dimming effect.

Product Features

- Single channel output, output current level selectable by DIP S.W.
- Support 3-in-1 dimming mode(0/1-10V active signal, adjustable resistance, PWM)
- High input voltage of 220VAC ~ 240VAC
- High efficiency up to 87%
- Built-in active PFC function
- 100% output when no dimming signal input, can be used as normal power supply
- Dimming effect smooth, no flicker
- Protections: Short circuit, over load
- Suitable for indoor LED lighting application, such as down light, panel light, and so on




Application




Technical Parameters

Model	EUP30A-1HMC-1																																								
Input	Efficiency	87%@230VAC, Full load																																							
	Voltage	220VAC-240VAC																																							
	Frequency Range(Hz)	50/60Hz																																							
	Power Factor	≥0.95@230VAC, Full load																																							
	THD(full load)	<10%@230VAC, Full load																																							
	AC Current(max)	0.17Amax@230VAC																																							
	Inrush Current(max)	Cold start, 28A (twidh=30us measured at 50% Ipeak)@230VAC																																							
Output	Current(mA)/Voltage (VDC)	550mA/9-45VDC/24.75W	600mA/9-45VDC/27W	650mA/9-45VDC/29.25W	700mA/9-43VDC/30.1W																																				
	Power(W)	750mA/9-40VDC/30W	800mA/9-38VDC/30.4W	850mA/9-35VDC/29.75W	900mA/9-34VDC/30.6W																																				
	Ripple Current	<3%																																							
	Channel	1																																							
	Current Tolerance	±5%																																							
	Standby Power	<1W																																							
	No load output voltage	50V Max																																							
		<table border="1"> <thead> <tr> <th colspan="2"></th> <th>1</th> <th>2</th> <th>3</th> <th>4</th> <th>5</th> <th>6</th> <th>7</th> <th>8</th> <th>9</th> <th>10</th> </tr> </thead> <tbody> <tr> <td>ON</td> <td>OFF</td> <td>550mA</td> <td>600mA</td> <td>650mA</td> <td>700mA</td> <td>750mA</td> <td>800mA</td> <td>850mA</td> <td>900mA</td> <td colspan="2"></td> </tr> <tr> <td colspan="2"></td> <td>9-45V</td> <td>9-45V</td> <td>9-45V</td> <td>9-43V</td> <td>9-40V</td> <td>9-38V</td> <td>9-35V</td> <td>9-34V</td> <td colspan="2"></td> </tr> </tbody> </table> <p>Remark: Function default setting is: 550mA (@switch are all OFF state)</p>						1	2	3	4	5	6	7	8	9	10	ON	OFF	550mA	600mA	650mA	700mA	750mA	800mA	850mA	900mA					9-45V	9-45V	9-45V	9-43V	9-40V	9-38V	9-35V	9-34V		
		1	2	3	4	5	6	7	8	9	10																														
ON	OFF	550mA	600mA	650mA	700mA	750mA	800mA	850mA	900mA																																
		9-45V	9-45V	9-45V	9-43V	9-40V	9-38V	9-35V	9-34V																																
Function	Dimming Type	0/1-10V																																							
	Dimming Range	0.1%-100% Dimming to off																																							
Protection	Short Circuit	after fault removed Close output ,the output current recovers automatically																																							
	Over Load	When the output voltage is exceeded, the output current decreases and, recovers automatically when the load is reduced.																																							
Safety& EMC	Surge	L-N:1000V																																							
	Withstand Voltage	I/P-O/P: 3000VAC/1min/5mA																																							
	Safety Standards	EN61347, GB19510																																							
	EMC Emission	EN55015, EN61000-3-2																																							
	EMC Immunity	EN61000-4-2, 3, 4, 5, 6, 8, 11; EN61547																																							
Others	Working Temp.	-20°C~50°C																																							
	Storage Temp., Humidity	-40°C~85°C, 20-90%RH																																							
	tc	90°C																																							
	Material	PC																																							
	IP Rating	IP20																																							
	Lifetime	30,000h@tc:80°C																																							
	Warranty Condition	3 years																																							
	Switch Cycle	>15,000 times																																							
	Packing(weight)	Net weight: 155g±5%/PCS; 50PCS/Carton; 8.25kg±5%/Carton; Carton Size: 333*268*150mm(L*W*H)																																							
	Dimension	150*43*29mm (L*W*H)																																							


Dimension(mm)

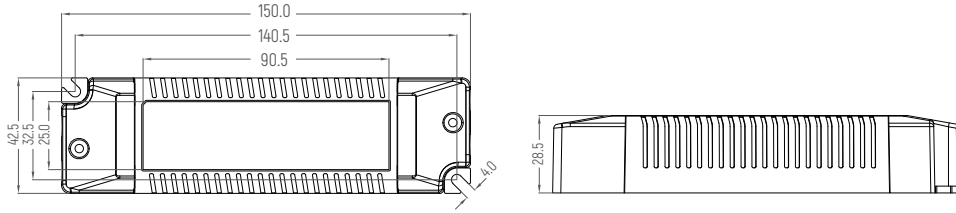


0/1-10V Wiring

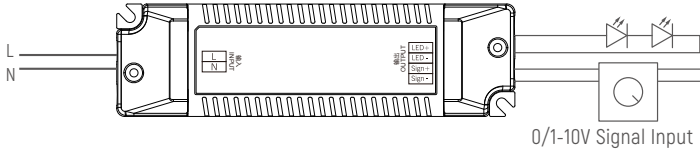

Dimming Curve

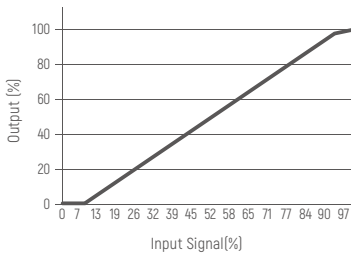

Derating Curve



Cautions

- 1.This product should be installed by qualified personnel.
- 2.This product is non waterproof, need to avoid sun and rain.In case of outdoor use, please ensure it is mounted in a water proof enclosure.
- 3.Good heat dissipation conditions extend product life. Please install the product in a well-ventilated environment.
- 4.Please make sure LED power supply output voltage, current is used to meet the product requirements.
- 5.Please ensure that adequate sized cable is used from the controller to the LED lights to carry the current. Please also ensure that the cable is secured tightly in the connector.
- 6.Due to safety concerns, PVC or rubber cord of 0.75-1.5mm² is recommended for input and output terminal(s)(excluding signal terminals). Flat power cord is not suitable.Ensure all wire connections and polarities are correct before applying power to avoid any damages to the LED lights.
- 7.In case of malfunction, do not repair it yourself.

※ The contents of this manual are updated without prior notice. If the function of the product you are using is inconsistent with the instructions, the function of the product shall prevail.Please contact us if you have any questions .

EUP30A-1HMC-1 (产品代码:103100242101)

概述

EUP30A-1HMC-1是一款可以提供550/600/550/700/750/800/850/900mA 8档电流的LED驱动器。输出电流可以通过DIP拨码开关简易设置,可以通过外部0/1-10V有源信号,可调电阻,PWM信号实现平滑调光;当不接外信号时,可作为常规电源使用。

产品特点

- 单通道恒流输出,多级电流可选
- 支持三合一调光 (0/1-10V有源信号,可调电阻,PWM信号)
- 高电压输入: 220VAC ~ 240VAC
- 效率高达 87%
- 内建主动式PFC功能
- 信号悬空时,满载输出,可作为电源使用
- 过载保护,短路保护
- 适用于LED室内灯具,比如筒灯,射灯,面板灯等



应用



筒灯



面板灯



射灯



吸顶灯



装饰灯



落地灯




投光灯




技术参数

型号	EUP30A-1HMC-1																																					
输入	效率	87%@230VAC, 满载																																				
	电压	220VAC-240VAC																																				
	频率	50/60Hz																																				
	功率因素	≥0.95@230VAC, 满载																																				
	THD	<10%@230VAC, 满载																																				
	电流	0.17Amax@230VAC																																				
	浪涌电流	冷启动28A(在 50%Ipeak下测twidth=30us)@230VAC																																				
输出	电流/电压/功率	550mA/9-45VDC/24.75W 600mA/9-45VDC/27W 650mA/9-45VDC/29.25W 700mA/9-43VDC/30.1W 750mA/9-40VDC/30W 800mA/9-38VDC/30.4W 850mA/9-35VDC/29.75W 900mA/9-34VDC/30.6W																																				
	波纹电流	<3%																																				
	通道	1																																				
	电流公差	±5%																																				
	待机功耗	<1W																																				
	空载输出电压	50V Max																																				
		电流选择表 <table border="1"> <tr> <td>ON</td> <td>OFF</td> <td>1</td> <td>2</td> <td>3</td> <td>4</td> <td>5</td> <td>6</td> <td>7</td> <td>8</td> <td>9</td> <td>10</td> </tr> <tr> <td></td> <td></td> <td>550mA</td> <td>600mA</td> <td>650mA</td> <td>700mA</td> <td>750mA</td> <td>800mA</td> <td>850mA</td> <td>900mA</td> <td></td> <td></td> </tr> <tr> <td></td> <td></td> <td>9-45V</td> <td>9-45V</td> <td>9-45V</td> <td>9-43V</td> <td>9-40V</td> <td>9-38V</td> <td>9-35V</td> <td>9-34V</td> <td></td> <td></td> </tr> </table> <p>备注: 出厂默认设置电流为550mA(12在OFF状态)</p>	ON	OFF	1	2	3	4	5	6	7	8	9	10			550mA	600mA	650mA	700mA	750mA	800mA	850mA	900mA					9-45V	9-45V	9-45V	9-43V	9-40V	9-38V	9-35V	9-34V		
ON	OFF	1	2	3	4	5	6	7	8	9	10																											
		550mA	600mA	650mA	700mA	750mA	800mA	850mA	900mA																													
		9-45V	9-45V	9-45V	9-43V	9-40V	9-38V	9-35V	9-34V																													
功能	调光方式	0/1-10V																																				
	调光范围	0.1%-100% 变暗直至关闭																																				
保护	短路	关闭输出, 排除故障后自恢复																																				
	过载	当超过输出电压时, 输出电流减小, 当负载降低时自动恢复																																				
安全 & 电磁兼容	浪涌	L-N:1000V																																				
	耐压标准	I/P-O/P: 3000VAC/1min/5mA																																				
	安全标准	EN61347, GB19510																																				
	电磁兼容	EN55015, EN61000-3-2																																				
	EMC抗扰度	EN61000-4-2, 3, 4, 5, 6, 8, 11; EN61547																																				
其它	工作温度	-20°C~50°C																																				
	储存温度、湿度	-40°C~85°C, 20-90%RH																																				
	tc	90°C																																				
	材质	PC																																				
	防水等级	IP20																																				
	寿命	30,000小时@tc:80°C																																				
	质保	3年																																				
	开关周期	>15,000次																																				
	包装尺寸(重量)	净重: 155g±5%/PCS; 50PCS/Cartron; 8.25kg±5%/箱; 外箱尺寸: 333*268*150cm(长*宽*高)																																				
	尺寸	150*43*29mm (长*宽*高)																																				


尺寸(mm)

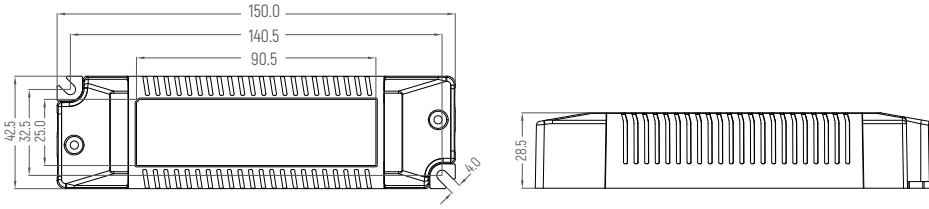


接线图

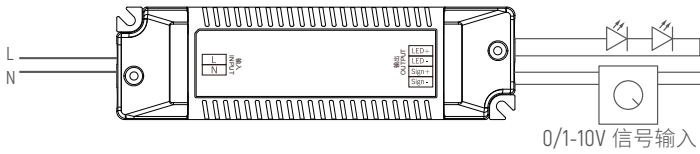

调光曲线

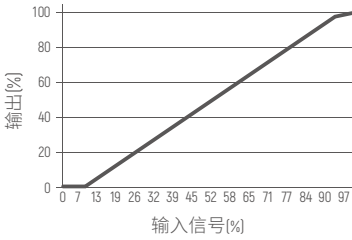

降额曲线



注意事项:

- 1、本产品请由具有专业资格的人员进行调试安装。
- 2、本产品不能防水，需避免日晒雨淋，如安装在户外，请用防水箱。
- 3、良好的散热条件会延长产品的使用寿命，请把产品安装在通风良好的环境。
- 4、请检查使用的LED电源输出电压电流，是否符合产品要求。
- 5、出于安全考虑，推荐输入和输出（信号端除外）用0.75-1.5mm² PVC或橡胶线缆，并确保接线牢固，以免电线过热或接触不良触发事故。扁平电源线不适用。
- 6、通电调试前，应确保所有接线正确，以避免因接线错误而导致灯具损坏。
- 7、如果发生故障，请勿私自维修；如有疑问，请联系供应商。

※ 本说明书内容如有更新，恕不另行通知。若您使用的产品功能与说明书不一致时，请以产品为准。
如有疑问请与我们联系。