

5 in 1 LED Controller

Model No.: SR5-P


Features

- Waterproof Controller, IP66
- Built-in 18 dynamic mode with jumping, gradually changing(only for 2.4G remote control)
- Auto-forwarding: Automatically forward the remote control signal to another controller, making the remote control distance infinite
- Automatic synchronization: The same dynamic mode is automatically synchronized, so that the mode is always consistent
- Have DND function, usually used in power failure area and save power
- Support TUYA SMART app control (2.4GHz gateway is needed)
- Support third party voice control like Alexa, Google assistant, Yandex Alice, Tmall Genie, Baidu and Xiaomi (2.4GHz gateway is needed)









Parameters


| | |
|------------------------------------|---|
| Name: 5 in 1 LED Controller | Working Temperature: -10~40 °C |
| Model No.: SR5-P | EMC Standard (EMC): ETSI EN 301 489-1 V2.2.3(2019-11) ETSI EN 301 489-3 V2.3.2 (2023-01) |
| Input Voltage: DC12~24V | |
| Output Current: 6A/ Single channel | Safety Standard (LVD): EN 61347-1: 2015+A1:2021 EN 61347-2-11:2001+A1:2019 |
| Total Output: Max 12A | |
| Protocol: 2.4GHz RF | Radio Equipment (RED): ETSI EN 300 328 V2.2.2 (2019-07) |
| Control Distance: 30m | Certification: CE, EMC, LVD, RED |
| IP Rating: IP66 | |

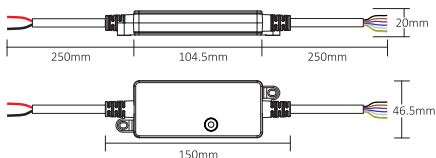


Connection Diagram



Application Diagram

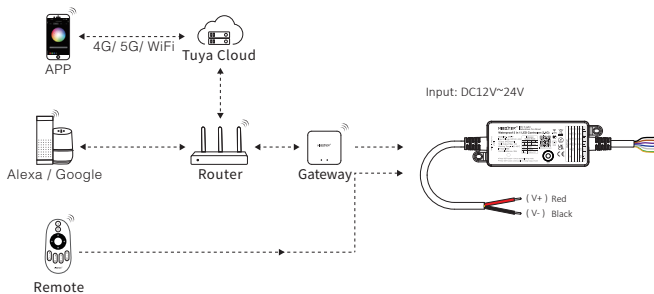


Compatible with these 2.4G RF remote controls (Purchased separately)

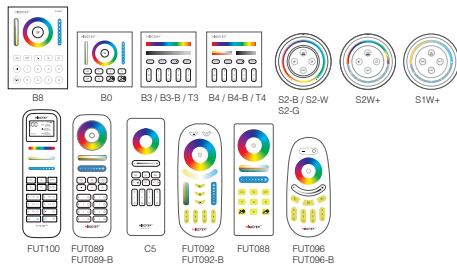

2.4G RF Remote control instruction

Linking Code Instructions



Power off 10 seconds and power on again.



Short press " | " button 3 times within 3 seconds.




Lights blink 3 times slowly means linking is done successfully.



Linking failed if light is not blinking slowly, Please follow above steps again.
(Note: Light that have linked can't link again)

Unlinking Code Instructions



Power off 10 seconds and power on again.



Short press " | " button 5 times within 3 seconds.




Lights blink 10 times quickly means unlinking is done successfully.






Unlinking failed if light is not blinking quickly, Please follow above steps again.
(Note: Light haven't linked that don't need to unlink)

DMX512 LED Transmitter Control (Purchased separately)

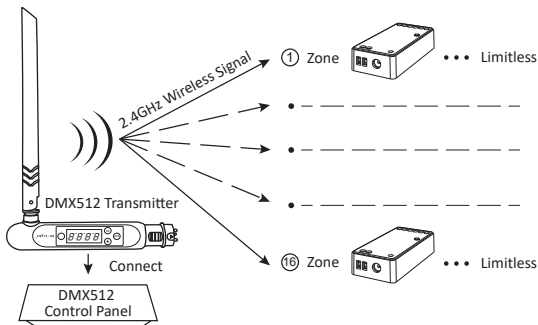

DMX512 LED Transmitter Link/Unlink

- 1 Follow instruction of DMX512 transmitter (FUTD01), Choose the zone for the light by pressing “+” or “-” (e.g. “CH12” means zone 12)



Link

The controller is powered off for 10 seconds and then powered on, or press “SET” button 1 time.

Short press “SET” 3 times within 3 seconds while the indicator of controller is ON

Link is done once indicator of controller flashes 3 times slowly

Unlink

The controller is powered off for 10 seconds and then powered on, or press “SET” button 1 time.

Short press “SET” 5 times within 3 seconds while the indicator of controller is ON


Unlink is done once indicator of controller flashes 10 times quickly



If the link or unlink failed, please follow the above steps again.

Transmitting function instruction

One Controller can transmit the signals from the remote control to another Controller within 30m, as long as there is a Controller within 30m, the remote control distance can be limitless.

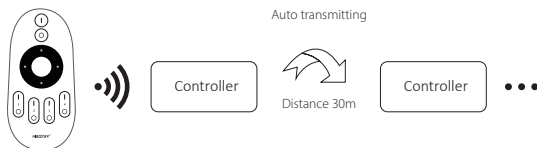

Attention: All "Controller" must be linked with one remote.

Turn Do Not Disturb mode on and off (ON by default)

Turn on "Do Not Disturb" (applicable to areas with frequent power outages to save energy)

Turn on Do Not Disturb mode:

Short press the "OFF" button 3 times within 3 seconds, and then short press the "ON" button 3 times. The light flashes 4 times to indicate success.

Note: When the lamp is powered on again after a power outage, its status (lights on or off) will remain the same as before the power outage.

Turn off Do Not Disturb mode:

Short press the "ON" button 3 times within 3 seconds, and then short press the "OFF" button 3 times. The light flashes 4 times slowly to indicate successful shutdown.

Note: When the lamp is powered on again after a power outage, its status will be on by default.

Notice

1. Please check whether the voltage of the power supply is in accordance with the light, and please check the connection of both the cathode and anode, otherwise the light will be broken.
2. Please don't connect wires with power on. Please turn on again only when it is in right connection and no short circuit.
3. Non-professional user cannot dismantle the lighting fixtures directly.
4. Please do not use the light in the place with widely range metal area or strong electromagnetic wave nearby, otherwise, the remote distance will be seriously affected.

Made in China



Dimmer can not use in humid area